


2'FER XL™ FRONT OR REAR

Light

Part# 7085185





Part# 7085523(2 PACK)

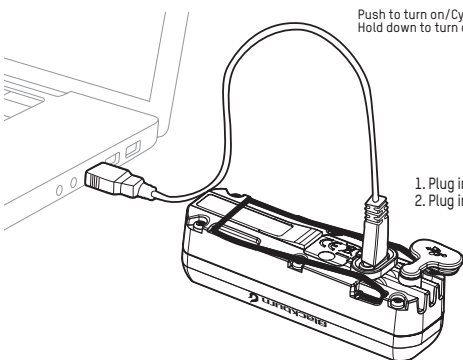

Push to turn on/Cycle Modes /
Hold down to turn off

1. Plug into Micro USB port
2. Plug into computer USB port

Versatile clip mount and silicone strap



The light indicator will blink when charging.
When charging is complete the light indicator with flash green.

GREEN = 100% to 75% Battery Capacity
ORANGE = 75% to 25% Battery Capacity
RED = <25% Battery Capacity

When battery capacity is 25-35 minutes or less, red indicator light will remain on constant until light reaches 0% or turns off in the selected mode.

MAKE SURE TO FULLY CHARGE LIGHT BEFORE FIRST USE

2'FER XL FRONT™

200 Lumen White LEDs

FLY STANDARD	HIGH	STROBE
	200 LUMENS	200 LUMENS
	2 hrs	6 hrs
	1000 cd	1000 cd
	63 m	63 m



2'FER XL REAR™

40 Lumen Red LEDs

FLY STANDARD	HIGH	STROBE
	40 LUMENS	40 LUMENS
	4 hrs	12 hrs
	20 cd	20 cd

⚠ WARNING: POTENTIAL CHOKING HAZARD TO CHILDREN. THIS LIGHT IS EXTREMELY BRIGHT - DO NOT AIM DIRECTLY INTO EYES. UK ONLY: WHEN USED FOR CYCLING, THIS LIGHT SHOULD BE USED IN CONJUNCTION WITH BRITISH STANDARD 6102/3 CYCLE LIGHT.

Visit us at blackburndesign.com for product updates.

Blackburn

Customer Service: 1-800-456-2355

Blackburndesign.com

Printed in China

**LIMITED
LIFETIME
WARRANTY**

*RESTRICTIONS & CONDITIONS APPLY

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: • Reorient or relocate the receiving antenna. • Increase the separation between the equipment and receiver. • Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. • Consult the dealer or an experienced radio/TV technician for help. Shielded interface cable must be used with the equipment in order to comply with the limits for a digital device pursuant to Subpart B of Part 15 of FCC Rules. Specifications and designs are subject to change without any notice or obligation on the part of the manufacturer.